

Lecture

Navigation Equations: Nav Mechanization

EE 570: Location and Navigation

Lecture Notes Update on April 3, 2014

Stephen Bruder, Electrical & Computer Engineering, Embry-Riddle Aeronautical University
Aly El-Osery, Electrical Engineering Dept., New Mexico Tech

Nav Mechanization

- Determine the position, velocity and attitude of the **body** frame *wrt* the **Nav** frame.
 - **Position** — Typically described in curvilinear coordinates: $[L_b, \lambda_b, h_b]^T$
 - **Velocity** — Velocity of the body frame *wrt* the earth frame resolved in the navigation frame: \vec{v}_{eb}^n
 - **Attitude** — Orientation of the body frame *wrt* the navigation frame: C_b^n


ECEF/Nav

- Description of the Nav frame


- Orientation of the *n*-frame *wrt* the *e*-frame

$$\begin{aligned} C_n^e(t) &= R_{(\vec{z}, \lambda_b(t))} R_{(\vec{y}, -L_b(t) - 90^\circ)} \\ &= \begin{bmatrix} \cos \lambda_b(t) & -\sin \lambda_b(t) & 0 \\ \sin \lambda_b(t) & \cos \lambda_b(t) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} -\sin L_b(t) & 0 & -\cos L_b(t) \\ 0 & 1 & 0 \\ \cos L_b(t) & 0 & -\sin L_b(t) \end{bmatrix} \\ &= \begin{bmatrix} -\sin L_b(t) \cos \lambda_b(t) & -\sin \lambda_b(t) & -\cos L_b(t) \cos \lambda_b(t) \\ -\sin L_b(t) \sin \lambda_b(t) & \cos \lambda_b(t) & -\cos L_b(t) \sin \lambda_b(t) \\ \cos L_b(t) & 0 & -\sin L_b(t) \end{bmatrix} \end{aligned}$$

where geodetic Lat = L_b
and Geodetic Lon = λ_b

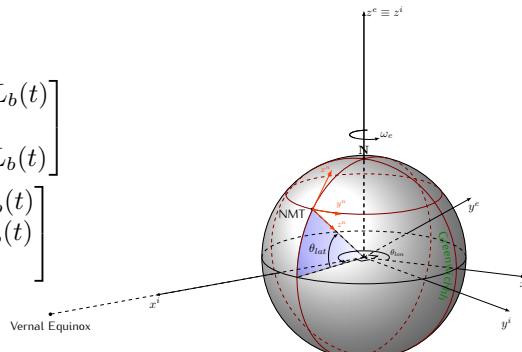

Body wrt Nav Frame

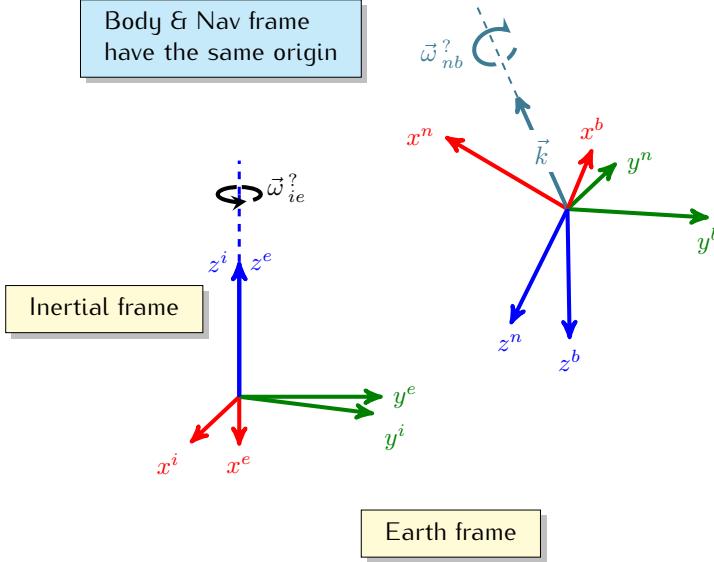

.4

Attitude — Method A

- Start with angular velocity

$$\vec{\omega}_{ib}^b = \vec{\omega}_{ie}^b + \vec{\omega}_{en}^b + \vec{\omega}_{nb}^b \rightarrow \vec{\omega}_{nb}^b = \vec{\omega}_{ib}^b - \vec{\omega}_{ie}^b - \vec{\omega}_{en}^b$$

- Now

$$\begin{aligned}\dot{C}_b^n &= C_b^n \Omega_{nb}^b = C_b^n (\Omega_{ib}^b - \Omega_{ie}^b - \Omega_{en}^b) \\ &= C_b^n \Omega_{ib}^b - C_b^n \Omega_{ie}^b - C_b^n \Omega_{en}^b \\ &= C_b^n \Omega_{ib}^b - (\Omega_{ie}^n + \Omega_{en}^n) C_b^n\end{aligned}$$

Recall that:
 $[(C\vec{\omega}) \times] = C[\vec{\omega} \times]C^T$
 $C[\vec{\omega} \times] = [(C\vec{\omega}) \times]C$

$$\omega_{ie}^n = C_e^n \omega_{ie}^e = \omega_{ie} \begin{bmatrix} \cos L_b \\ 0 \\ -\sin L_b \end{bmatrix}$$

.5

Attitude — Method A

- $\Omega_{eb}^n = [\vec{\omega}_{en}^n \times]$
- Courtesy of Prof. Bruder and Mathematica

$$\dot{C}_n^e = C_n^e \Omega_{en}^n \rightarrow \Omega_{en}^n = (C_n^e)^T \dot{C}_n^e = \begin{bmatrix} 0 & \dot{\lambda}_b \sin L_b & -\dot{L}_b \\ -\dot{\lambda}_b \sin L_b & 0 & -\dot{\lambda}_b \cos L_b \\ \dot{L}_b & \dot{\lambda}_b \cos L_b & 0 \end{bmatrix}$$

- therefore,

$$\omega_{en}^n = \begin{bmatrix} \dot{\lambda}_b \cos L_b \\ -\dot{L}_b \\ -\dot{\lambda}_b \sin L_b \end{bmatrix}$$

- Finally since,

• then

$$\begin{bmatrix} \dot{L}_b \\ \dot{\lambda}_b \\ \dot{h}_b \end{bmatrix} = \begin{bmatrix} \vec{v}_{eb,N}^n \\ \frac{\vec{v}_{eb,E}^n}{R_N + h_b} \\ \frac{\vec{v}_{eb,D}^n}{\cos(L_b)(R_E + h_b)} \end{bmatrix} \quad \omega_{en}^n = \begin{bmatrix} \frac{\vec{v}_{eb,E}^n}{R_E + h_b} \\ -\frac{\vec{v}_{eb,N}^n}{R_N + h_b} \\ -\frac{\tan(L_b)\vec{v}_{eb,E}^n}{R_E + h_b} \end{bmatrix} \quad (1)$$

Attitude — Method A

$$\begin{aligned} C_b^n(+) - C_b^n(-) &\approx \Delta t \dot{C}_b^n \\ C_b^n(+) &\approx C_b^n(-) + \Delta t [C_b^n \Omega_{ib}^b - (\Omega_{ie}^n + \Omega_{en}^n) C_b^n(-)] \\ &= C_b^n(-) (\mathcal{I} + \Omega_{ib}^b \Delta t) - (\Omega_{ie}^n + \Omega_{en}^n) C_b^n(-) \Delta t \end{aligned}$$

Attitude — Method B

- Body orientation frame at time "k" wrt time "k - 1"
 - $\Delta t = t_k - t_{k-1}$
- Start with the angular velocity

$$\begin{aligned} \omega_{nb}^b &= \omega_{ib}^b - \omega_{ie}^b - \omega_{en}^b \\ \Omega_{nb}^b &= \Omega_{ib}^b - \Omega_{ie}^b - \Omega_{en}^b \\ &= \Omega_{ib}^b - C_n^b \Omega_{ie}^n C_b^n - C_n^b \Omega_{en}^n C_b^n \\ C_b^n(+) &= C_b^n(-) e^{\Omega_{nb}^b \Delta t} \\ C_b^n(+) &= C_b^n(-) [\mathcal{I} + \sin(\Delta\theta) \vec{\kappa} + [1 - \cos(\Delta\theta)] \vec{\kappa}^2] \end{aligned}$$

$e^{\Omega_{nb}^b \Delta t} = e^{\vec{\kappa} \Delta \theta}$

Attitude — Method C

- Body orientation frame at time "k" wrt time "k - 1"
 - $\Delta t = t_k - t_{k-1}$

$$\begin{aligned} \bar{q}_b^n(+) &= \bar{q}_b^n(-) \otimes \Delta \bar{q}_{b(k)}^{b(k-1)} \quad \vec{\omega}_{nb}^b \Delta t = \vec{k} \Delta \theta \\ \Delta \bar{q}_{b(k)}^{b(k-1)} &= \begin{bmatrix} \cos(\frac{\Delta\theta}{2}) \\ \vec{k} \sin(\frac{\Delta\theta}{2}) \end{bmatrix} \end{aligned}$$

Need to periodically renormalize \bar{q}

Attitude Update— Summary

- High fidelity

$$C_b^n(+) = C_b^n(-) [\mathcal{I} + \sin(\Delta\theta) \vec{\kappa} + [1 - \cos(\Delta\theta)] \vec{\kappa}^2] \quad (2)$$

or

$$\begin{aligned} \bar{q}_b^n(+) &= \bar{q}_b^n(-) \otimes \Delta \bar{q}_{b(k)}^{b(k-1)} \\ \Delta \bar{q}_{b(k)}^{b(k-1)} &= \begin{bmatrix} \cos(\frac{\Delta\theta}{2}) \\ \vec{k} \sin(\frac{\Delta\theta}{2}) \end{bmatrix} \end{aligned} \quad (3)$$

- Low fidelity

$$C_b^n(+) \approx C_b^n(-) (\mathcal{I} + \Omega_{ib}^b \Delta t) - (\Omega_{ie}^n + \Omega_{en}^n) C_b^n(-) \Delta t \quad (4)$$

Steps 2–4

2. Specific force transformation

- Simply coordinatize the specific force

$$\vec{f}_{ib}^n = C_b^n (+) \vec{f}_{ib}^b \quad (5)$$

.11

Steps 2–4

3. Velocity update

$$\dot{\vec{v}}_{eb}^e = \vec{a}_{eb}^e = \vec{f}_{ib}^e + \vec{g}_b^e + 2\Omega_{ie}^e \vec{v}_{eb}^e$$

- Note that: $\vec{v}_{eb}^n = C_e^n \vec{v}_{eb}^e$

$$\begin{aligned} \dot{\vec{v}}_{eb}^n &= \dot{C}_e^n \vec{v}_{eb}^e + C_e^n \dot{\vec{v}}_{eb}^e \\ &= \Omega_{ne}^n C_e^n \vec{v}_{eb}^e + C_e^n \left(\vec{f}_{ib}^e + \vec{g}_b^e - 2\Omega_{ie}^e \vec{v}_{eb}^e \right) \\ &= \vec{f}_{ib}^n + \vec{g}_b^n - \Omega_{en}^n \vec{v}_{eb}^n - 2C_e^n \Omega_{ie}^e \vec{v}_{eb}^e \\ &= \vec{f}_{ib}^n + \vec{g}_b^n - \Omega_{en}^n \vec{v}_{eb}^n - 2\Omega_{ie}^n C_e^n \vec{v}_{eb}^e \\ &= \vec{f}_{ib}^n + \vec{g}_b^n - (\Omega_{en}^n - 2\Omega_{ie}^n) \vec{v}_{eb}^n \end{aligned}$$

- Finally,

$$\vec{v}_{eb}^n (+) = \vec{v}_{eb}^n (-) + \Delta t \left[\vec{f}_{ib}^n + \vec{g}_b^n - (\Omega_{en}^n + 2\Omega_{ie}^n) \vec{v}_{eb}^n (-) \right]$$

.12

Steps 2–4

4. Position update

- Recalling that

$$\begin{bmatrix} \dot{L}_b \\ \dot{\lambda}_b \\ \dot{h}_b \end{bmatrix} = \begin{bmatrix} \frac{\vec{v}_{eb,N}^n}{R_N + h_b} \\ \frac{\vec{v}_{eb,E}^n}{\cos(L_b)(R_E + h_b)} \\ -\vec{v}_{eb,D}^n \end{bmatrix}$$

5. then

$$\begin{aligned} h_b(+)&=h_b(-)-\Delta t \left[\vec{v}_{eb,D}^n \right] \\ L_b(+)&=L_b(-)+\Delta t \left[\frac{\vec{v}_{eb,N}^n}{R_N + h_b} \right] \\ \lambda_b(+)&=\lambda_b(-)+\Delta t \left[\frac{\vec{v}_{eb,E}^n}{\cos(L_b)(R_E + h_b)} \right] \end{aligned}$$

.13

Nav Mechanization Summary


$$C_b^n(+) = C_b^n(-) [\mathcal{I} + \sin(\Delta\theta)\hat{\kappa} + [1 - \cos(\Delta\theta)]\hat{\kappa}^2] \quad (6)$$

or

$$\bar{q}_b^n(+) = \bar{q}_b^n(-) \otimes \Delta \bar{q}_{b(k)}^{b(k-1)}, \quad \Delta \bar{q}_{b(k)}^{b(k-1)} = \begin{bmatrix} \cos(\frac{\Delta\theta}{2}) \\ \vec{k} \sin(\frac{\Delta\theta}{2}) \end{bmatrix} \quad (7)$$

or

$$C_b^n(+) \approx C_b^n(-) (\mathcal{I} + \Omega_{ib}^b \Delta t) - (\Omega_{ie}^n + \Omega_{en}^n) C_b^n(-) \Delta t \quad (8)$$

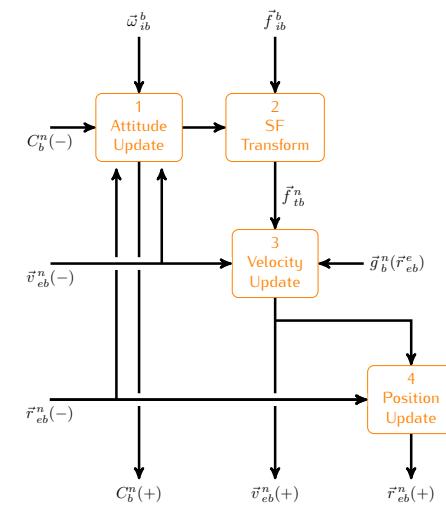

.14

Nav Mechanization Summary

$$\vec{f}_{ib}^n = C_b^n(+) \vec{f}_{ib}^b \quad (9)$$


$$\vec{a}_{eb}^n = \vec{f}_{ib}^n + \vec{g}_b^n - (\Omega_{en}^n + 2\Omega_{ie}^n) \vec{v}_{eb}^n \quad (10)$$

$$\vec{v}_{eb}^n(+) = \vec{v}_{eb}^n(-) + \Delta t \left[\vec{f}_{ib}^n + \vec{g}_b^n - (\Omega_{en}^n - 2\Omega_{ie}^n) \vec{v}_{eb}^n(-) \right] \quad (11)$$

$$L_b(+) = L_b(-) + \Delta t \left[\frac{\vec{v}_{eb,N}^n}{R_N + h_b} \right] \quad (12)$$

$$\lambda_b(+) = \lambda_b(-) + \Delta t \left[\frac{\vec{v}_{eb,E}^n}{\cos(L_b)(R_E + h_b)} \right] \quad (13)$$

$$h_b(+) = h_b(-) - \Delta t [\vec{v}_{eb,D}^n] \quad (14)$$

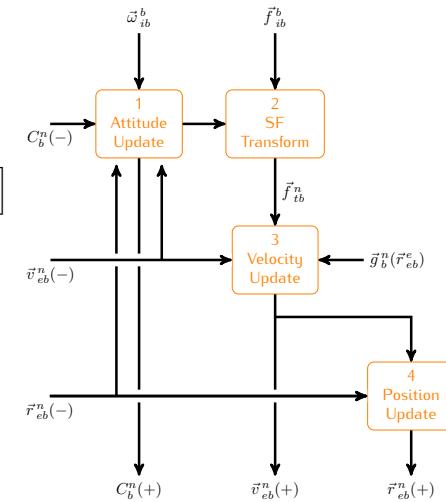

.15

Nav Mechanization — Continuous Case

- In continuous time notation

- Attitude: $\dot{C}_b^n = C_b^n \Omega_{ib}^b - (\Omega_{ie}^n + \Omega_{en}^n) C_b^n$
- Velocity: $\dot{\vec{v}}_{eb}^n = \vec{f}_{ib}^n + \vec{g}_b^n - (\Omega_{en}^n + 2\Omega_{ie}^n) \vec{v}_{eb}^n$
- Position:

$$\begin{bmatrix} \dot{L}_b \\ \dot{\lambda}_b \\ \dot{h}_b \end{bmatrix} = \begin{bmatrix} \frac{\vec{v}_{eb,N}^n}{R_N + h_b} \\ \frac{\vec{v}_{eb,E}^n}{\cos(L_b)(R_E + h_b)} \\ -\vec{v}_{eb,D}^n \end{bmatrix}$$

.16

Nav Mechanization — Continuous Case

- In State-space notation

$$\begin{bmatrix} \dot{L}_b \\ \dot{\lambda}_b \\ \dot{h}_b \\ \dot{\vec{v}}_{eb}^n \\ \dot{C}_b^n \end{bmatrix} = \begin{bmatrix} \frac{\vec{v}_{eb,N}^n}{R_N + h_b} \\ \frac{\vec{v}_{eb,E}^n}{\cos(L_b)(R_E + h_b)} \\ -\vec{v}_{eb,D}^n \\ \vec{f}_{ib}^n + \vec{g}_b^n - (\Omega_{en}^n + 2\Omega_{ie}^n)\vec{v}_{eb}^n \\ C_b^n \Omega_{ib}^b - (\Omega_{ie}^n + \Omega_{en}^n)C_b^n \end{bmatrix} \quad (15)$$

.17

Appendix

$$[\bar{q} \otimes] = \begin{bmatrix} q_s & -q_x & -q_y & -q_z \\ q_x & q_s & -q_z & q_y \\ q_y & q_z & q_s & -q_x \\ q_z & -q_y & q_x & q_s \end{bmatrix}$$

$$[\bar{q} \circledast] = \begin{bmatrix} q_s & -q_x & -q_y & -q_z \\ q_x & q_s & q_z & -q_y \\ q_y & -q_z & q_s & q_x \\ q_z & q_y & -q_x & q_s \end{bmatrix}$$

.18