

EE 565: Position, Navigation and Timing

Navigation Mathematics: Rotation Matrices


Kevin Wedeward Aly El-Osery

Electrical Engineering Department
New Mexico Tech
Socorro, New Mexico, USA


In Collaboration with
Stephen Bruder
Electrical and Computer Engineering Department
Embry-Riddle Aeronautical University
Prescott, Arizona, USA

January 23, 2018


- 1 Review
- 2 Attitude (Orientation)
- 3 Rotation Matrices
- 4 Examples
- 5 Summary

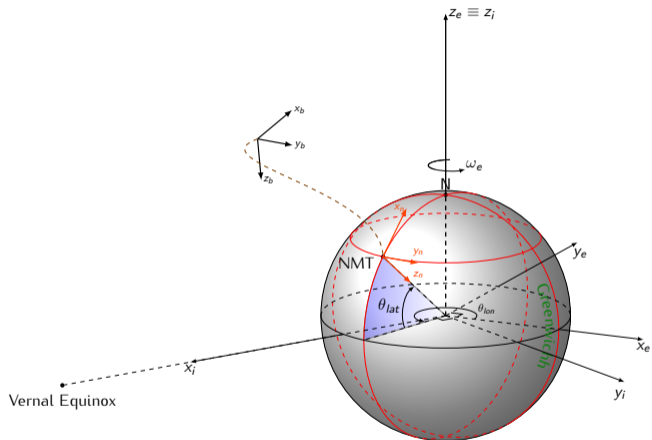


- Coordinate Frames - subscript will “name” axes (vectors)

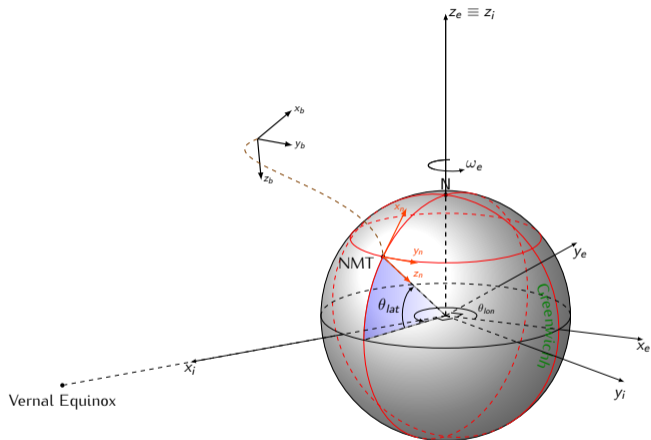


- Coordinate Frames - subscript will “name” axes (vectors)
- Earth-Centered Inertial (ECI) Frame - i

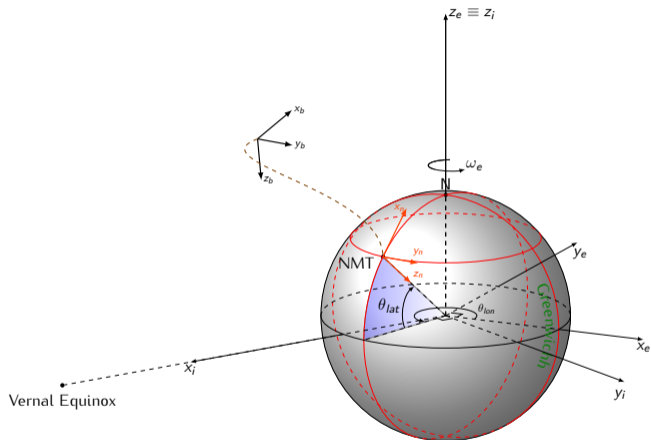


- Coordinate Frames - subscript will “name” axes (vectors)
- Earth-Centered Inertial (ECI) Frame - i
- Earth-Centered Earth-Fixed (ECEF) Frame - e

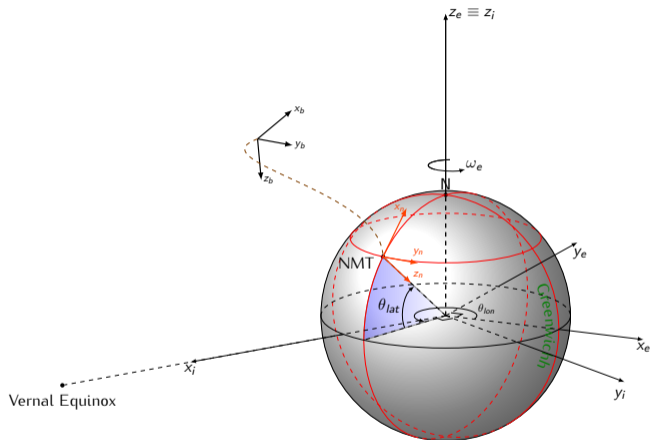

- Coordinate Frames - subscript will "name" axes (vectors)
- Earth-Centered Inertial (ECI) Frame - i
- Earth-Centered Earth-Fixed (ECEF) Frame - e
- Navigation (Nav) Frame - n

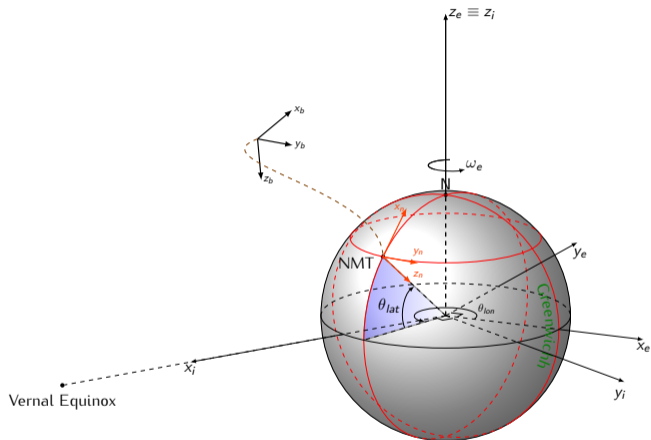


- Coordinate Frames - subscript will “name” axes (vectors)
- Earth-Centered Inertial (ECI) Frame - i
- Earth-Centered Earth-Fixed (ECEF) Frame - e
- Navigation (Nav) Frame - n
- Body Frame - b

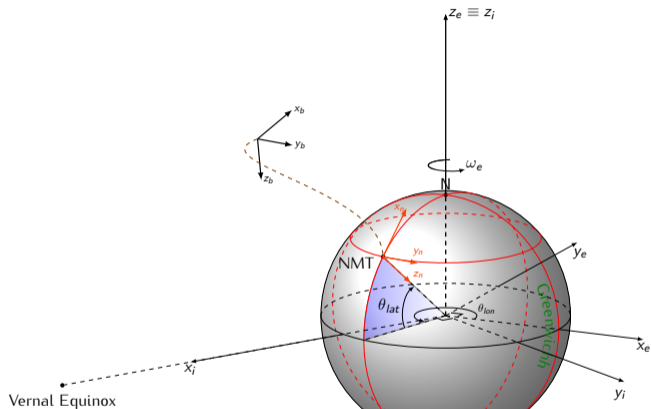


- Attitude describes orientation of one coordinate frame with respect to another.

- Attitude describes orientation of one coordinate frame with respect to another.
- How would one describe orientation of ECEF frame wrt ECI frame at point in time when angular difference is θ ?

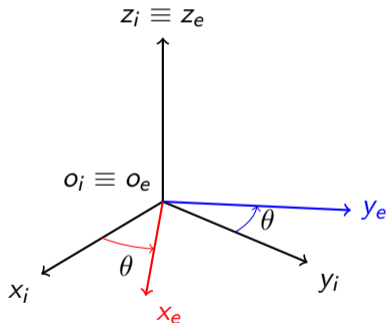

- Attitude describes orientation of one coordinate frame with respect to another.
- How would one describe orientation of ECEF frame wrt ECI frame at point in time when angular difference is θ ?

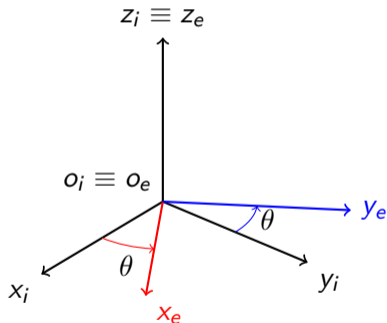

- e -frame rotated away from i -frame by angle θ about $z_i \equiv z_e$

- Less obvious, but equally valid, way of describing e -frame wrt i -frame is by giving coordinates of the e -frame's axes in the i -frame.

- Less obvious, but equally valid, way of describing e -frame wrt i -frame is by giving coordinates of the e -frame's axes in the i -frame.
- Leads to need for further notation:

- Less obvious, but equally valid, way of describing e -frame wrt i -frame is by giving coordinates of the e -frame's axes in the i -frame.
- Leads to need for further notation:

- x_e^i is $x_e = x_e^e = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$ coordinatized (written wrt) the i -frame


- Less obvious, but equally valid, way of describing e -frame wrt i -frame is by giving coordinates of the e -frame's axes in the i -frame.
- Leads to need for further notation:

- x_e^i is $x_e = x_e^e = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$ coordinatized (written wrt) the i -frame
- y_e^i is $y_e = y_e^e = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}$ coordinatized (written wrt) the i -frame


- Less obvious, but equally valid, way of describing e -frame wrt i -frame is by giving coordinates of the e -frame's axes in the i -frame.
- Leads to need for further notation:

- x_e^i is $x_e = x_e^e = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$ coordinatized (written wrt) the i -frame
- y_e^i is $y_e = y_e^e = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}$ coordinatized (written wrt) the i -frame
- z_e^i is $z_e = z_e^e = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$ coordinatized (written wrt) the i -frame

- x_e^i :




- x_e^i :




- $x_e^i = \begin{bmatrix} x_e \cdot x_i \\ x_e \cdot y_i \\ x_e \cdot z_i \end{bmatrix} = \begin{bmatrix} \|x_e\| \|x_i\| \cos(\theta) \\ \|x_e\| \|y_i\| \cos(90^\circ - \theta) \\ \|x_e\| \|z_i\| \cos(90^\circ) \end{bmatrix} = \begin{bmatrix} \cos(\theta) \\ \sin(\theta) \\ 0 \end{bmatrix}$

- y_e^i :

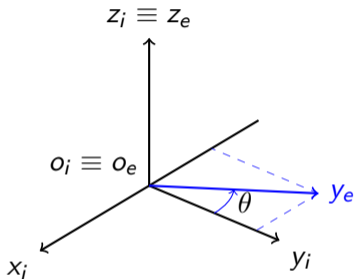


- y_e^i :

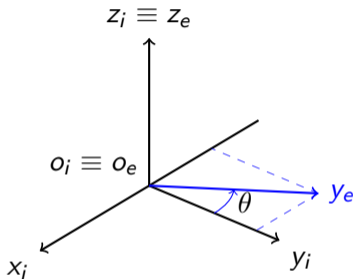


- $y_e^i = \begin{bmatrix} y_e \cdot x_i \\ y_e \cdot y_i \\ y_e \cdot z_i \end{bmatrix} = \begin{bmatrix} \|y_e\| \|x_i\| \cos(90^\circ + \theta) \\ \|y_e\| \|y_i\| \cos(\theta) \\ \|y_e\| \|z_i\| \cos(90^\circ) \end{bmatrix} = \begin{bmatrix} -\sin(\theta) \\ \cos(\theta) \\ 0 \end{bmatrix}$

- z_e^i :

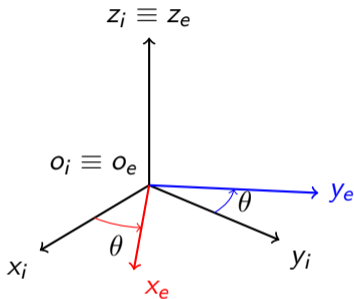

- z_e^i :

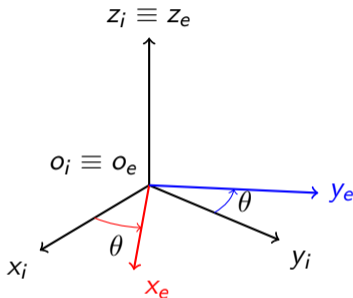

- $z_e^i = \begin{bmatrix} z_e \cdot x_i \\ z_e \cdot y_i \\ z_e \cdot z_i \end{bmatrix} = \begin{bmatrix} \|z_e\| \|x_i\| \cos(90^\circ) \\ \|z_e\| \|y_i\| \cos(90^\circ) \\ \|z_e\| \|z_i\| \cos(0) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$

- 3×3 matrix can be constructed by using each basis vector of the e -frame wrt i -frame as a column

- 3×3 matrix can be constructed by using each basis vector of the e -frame wrt i -frame as a column

- $C_e^i = \left[\begin{array}{c|c|c} x_e^i & y_e^i & z_e^i \end{array} \right] = \left[\begin{array}{c|c|c} \cos(\theta) & -\sin(\theta) & 0 \\ \sin(\theta) & \cos(\theta) & 0 \\ 0 & 0 & 1 \end{array} \right]$

- 3×3 matrix can be constructed by using each basis vector of the e -frame wrt i -frame as a column

- $C_e^i = \left[\begin{array}{c|c|c} x_e^i & y_e^i & z_e^i \end{array} \right] = \left[\begin{array}{c|c|c} \cos(\theta) & -\sin(\theta) & 0 \\ \sin(\theta) & \cos(\theta) & 0 \\ 0 & 0 & 1 \end{array} \right]$


- C_e^i describes the attitude/orientation of the e -frame wrt the i -frame

- 3×3 matrix can be constructed by using each basis vector of the e -frame wrt i -frame as a column


- $$C_e^i = \left[\begin{array}{c|c|c} x_e^i & y_e^i & z_e^i \end{array} \right] = \left[\begin{array}{c|c|c} \cos(\theta) & -\sin(\theta) & 0 \\ \sin(\theta) & \cos(\theta) & 0 \\ 0 & 0 & 1 \end{array} \right]$$

- C_e^i describes the attitude/orientation of the e -frame wrt the i -frame
- C_e^i referred to as a rotation matrix, coordinate transformation matrix, or direct cosine matrix (DCM)

- In general, a rotation matrix C_2^1 describes the orientation of **frame {2}** relative to **frame {1}**



- In general, a rotation matrix C_2^1 describes the orientation of **frame {2}** relative to **frame {1}**



- via $C_2^1 = [x_2^1, y_2^1, z_2^1] = \begin{bmatrix} x_2 \cdot x_1 & y_2 \cdot x_1 & z_2 \cdot x_1 \\ x_2 \cdot y_1 & y_2 \cdot y_1 & z_2 \cdot y_1 \\ x_2 \cdot z_1 & y_2 \cdot z_1 & z_2 \cdot z_1 \end{bmatrix}$

$$\begin{aligned} \bullet C_2^1 = [x_2^1, y_2^1, z_2^1] &= \begin{bmatrix} x_2 \cdot x_1 & y_2 \cdot x_1 & z_2 \cdot x_1 \\ x_2 \cdot y_1 & y_2 \cdot y_1 & z_2 \cdot y_1 \\ x_2 \cdot z_1 & y_2 \cdot z_1 & z_2 \cdot z_1 \end{bmatrix} = \begin{bmatrix} x_1 \cdot x_2 & x_1 \cdot y_2 & x_1 \cdot z_2 \\ y_1 \cdot x_2 & y_1 \cdot y_2 & y_1 \cdot z_2 \\ z_1 \cdot x_2 & z_1 \cdot y_2 & z_1 \cdot z_2 \end{bmatrix} \\ &= \begin{bmatrix} (x_1^2)^T \\ (y_1^2)^T \\ (z_1^2)^T \end{bmatrix} = [x_1^2, y_1^2, z_1^2]^T = [C_1^2]^T \end{aligned}$$

- $$C_2^1 = [x_2^1, y_2^1, z_2^1] = \begin{bmatrix} x_2 \cdot x_1 & y_2 \cdot x_1 & z_2 \cdot x_1 \\ x_2 \cdot y_1 & y_2 \cdot y_1 & z_2 \cdot y_1 \\ x_2 \cdot z_1 & y_2 \cdot z_1 & z_2 \cdot z_1 \end{bmatrix} = \begin{bmatrix} x_1 \cdot x_2 & x_1 \cdot y_2 & x_1 \cdot z_2 \\ y_1 \cdot x_2 & y_1 \cdot y_2 & y_1 \cdot z_2 \\ z_1 \cdot x_2 & z_1 \cdot y_2 & z_1 \cdot z_2 \end{bmatrix}$$

$$= \begin{bmatrix} (x_1^2)^T \\ (y_1^2)^T \\ (z_1^2)^T \end{bmatrix} = [x_1^2, y_1^2, z_1^2]^T = [C_1^2]^T$$

- opposite perspective (frame 2 wrt frame 1 given frame 1 wrt frame 2) is as simple as a matrix transpose!

$$\bullet [C_2^1]^T C_2^1 = C_1^2 C_2^1 = I \Rightarrow C_1^2 = [C_2^1]^T = [C_2^1]^{-1}$$

- 1 $[C_2^1]^T C_2^1 = C_1^2 C_2^1 = I \Rightarrow C_1^2 = [C_2^1]^T = [C_2^1]^{-1}$
- 2 $|([C_2^1]^T C_2^1)| = |C_2^1| |C_2^1| = |I| \Rightarrow |C_2^1| = \pm 1$ (+ for right hand coordinate system)

- 1 $[C_2^1]^T C_2^1 = C_1^2 C_2^1 = I \Rightarrow C_1^2 = [C_2^1]^T = [C_2^1]^{-1}$
- 2 $|[C_2^1]^T C_2^1| = |C_2^1| |C_2^1| = |I| \Rightarrow |C_2^1| = \pm 1$ (+ for right hand coordinate system)
- 3 columns and rows of C_2^1 are orthogonal


- 1 $[C_2^1]^T C_2^1 = C_1^2 C_2^1 = I \Rightarrow C_1^2 = [C_2^1]^T = [C_2^1]^{-1}$
- 2 $|([C_2^1]^T C_2^1)| = |C_2^1| |C_2^1| = |I| \Rightarrow |C_2^1| = \pm 1$ (+ for right hand coordinate system)
- 3 columns and rows of C_2^1 are orthogonal
- 4 magnitude of columns and rows in C_2^1 are 1

- So far, rotation matrix C developed to describe orientation

- So far, rotation matrix C developed to describe orientation
- C can also perform change of coordinates on vector

- Consider a point P with location described as a vector in coordinate frame $\{1\}$

$$\vec{P}^1 = \begin{bmatrix} u \\ v \\ w \end{bmatrix} = ux_1 + vy_1 + wz_1$$



- With \vec{P}^1 given, the location of point P can be described in coordinate frame $\{2\}$ via

$$\vec{P}^2 = \begin{bmatrix} \vec{P}^1 \cdot x_2 \\ \vec{P}^1 \cdot y_2 \\ \vec{P}^1 \cdot z_2 \end{bmatrix} = \begin{bmatrix} (ux_1 + vy_1 + wz_1) \cdot x_2 \\ (ux_1 + vy_1 + wz_1) \cdot y_2 \\ (ux_1 + vy_1 + wz_1) \cdot z_2 \end{bmatrix}$$

$$= \underbrace{\begin{bmatrix} x_1 \cdot x_2 & y_1 \cdot x_2 & z_1 \cdot x_2 \\ x_1 \cdot y_2 & y_1 \cdot y_2 & z_1 \cdot y_2 \\ x_1 \cdot z_2 & y_1 \cdot z_2 & z_1 \cdot z_2 \end{bmatrix}}_{?} \underbrace{\begin{bmatrix} u \\ v \\ w \end{bmatrix}}_{?}$$

$$\begin{aligned}
 &= \underbrace{\begin{bmatrix} x_1 \cdot x_2 & y_1 \cdot x_2 & z_1 \cdot x_2 \\ x_1 \cdot y_2 & y_1 \cdot y_2 & z_1 \cdot y_2 \\ x_1 \cdot z_2 & y_1 \cdot z_2 & z_1 \cdot z_2 \end{bmatrix}}_{C_1^2} \underbrace{\begin{bmatrix} u \\ v \\ w \end{bmatrix}}_{\vec{P}^1} \\
 &= C_1^2 \vec{P}^1
 \end{aligned}$$

- $\Rightarrow \vec{P}^2 = C_1^2 \vec{P}^1$

$$\begin{aligned}
 &= \underbrace{\begin{bmatrix} x_1 \cdot x_2 & y_1 \cdot x_2 & z_1 \cdot x_2 \\ x_1 \cdot y_2 & y_1 \cdot y_2 & z_1 \cdot y_2 \\ x_1 \cdot z_2 & y_1 \cdot z_2 & z_1 \cdot z_2 \end{bmatrix}}_{C_1^2} \underbrace{\begin{bmatrix} u \\ v \\ w \end{bmatrix}}_{\vec{P}^1} \\
 &= C_1^2 \vec{P}^1
 \end{aligned}$$

- $\Rightarrow \vec{P}^2 = C_1^2 \vec{P}^1$
- C_1^2 re-coordinated vector written wrt frame 1 into frame 2 by a matrix-multiplication

$$\begin{aligned}
 &= \underbrace{\begin{bmatrix} x_1 \cdot x_2 & y_1 \cdot x_2 & z_1 \cdot x_2 \\ x_1 \cdot y_2 & y_1 \cdot y_2 & z_1 \cdot y_2 \\ x_1 \cdot z_2 & y_1 \cdot z_2 & z_1 \cdot z_2 \end{bmatrix}}_{C_1^2} \underbrace{\begin{bmatrix} u \\ v \\ w \end{bmatrix}}_{\vec{P}^1} \\
 &= C_1^2 \vec{P}^1
 \end{aligned}$$

- $\Rightarrow \vec{P}^2 = C_1^2 \vec{P}^1$
- C_1^2 re-coordinated vector written wrt frame 1 into frame 2 by a matrix-multiplication
- superscripts and subscripts help track/denote re-coordination

Similarly, coordinate transformations can be performed opposite way as well

$$\vec{P}^2 = C_1^2 \vec{P}^1$$

$$\Rightarrow \vec{P}^1 = [C_1^2]^{-1} \vec{P}^2$$

Similarly, coordinate transformations can be performed opposite way as well


$$\begin{aligned}\vec{P}^2 &= C_1^2 \vec{P}^1 \\ \Rightarrow \vec{P}^1 &= [C_1^2]^{-1} \vec{P}^2 \\ &= [C_1^2]^T \vec{P}^2\end{aligned}$$

Similarly, coordinate transformations can be performed opposite way as well

$$\begin{aligned}\vec{P}^2 &= C_1^2 \vec{P}^1 \\ \Rightarrow \vec{P}^1 &= [C_1^2]^{-1} \vec{P}^2 \\ &= [C_1^2]^T \vec{P}^2 \\ &= C_2^1 \vec{P}^2\end{aligned}$$

Example 1

Given $C_b^a = \begin{bmatrix} 0 & -\frac{1}{2} & -\frac{\sqrt{3}}{2} \\ 0 & -\frac{\sqrt{3}}{2} & \frac{1}{2} \\ -1 & 0 & 0 \end{bmatrix}$ and frame a , sketch frame b .

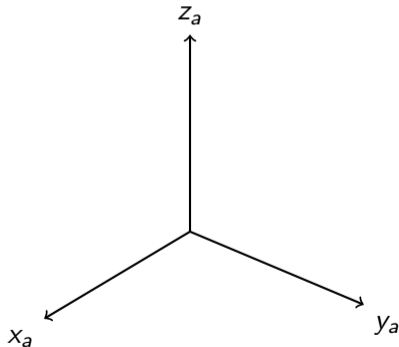

Example 2

Frame 1 has been rotated away from frame 0 by 30° about z_0 . Find \vec{r}^0 given $\vec{r}^1 = [0, 2, 0]^T$, $\cos(30^\circ) = \frac{\sqrt{3}}{2}$ and $\sin(30^\circ) = \frac{1}{2}$.

Rotation matrix can be thought of in three distinct ways:

- 1 It describes the orientation of one coordinate frame *wrt* another coordinate frame
- 2 It represents a coordinate transformation that relates the coordinates of a point (e.g., P) or vector in two different frames of reference
- 3 It is an operator that takes a vector \vec{p} and rotates it into a new vector $C\vec{p}$, both in the same coordinate frame

