

Lecture

Navigation Mathematics: Angular and Linear Velocity

EE 565: Position, Navigation and Timing

Lecture Notes Update on February 6, 2018

Kevin Wedeward and Aly El-Osery, Electrical Engineering Dept., New Mexico Tech
In collaboration with
Stephen Bruder, Electrical & Computer Engineering, Embry-Riddle Aeronautical University

_____ .1

Lecture Topics


Contents

1	Review	1
2	Intro to Vel	2
3	$\frac{d}{dt}C$ and ω - I	2
4	$\frac{d}{dt}C$ and ω - II	4
5	Properties of SS Matrices	6
6	Add Angular Velocity	7
7	Pos, Vel & Accel	7

_____ .2

1 Review

Review

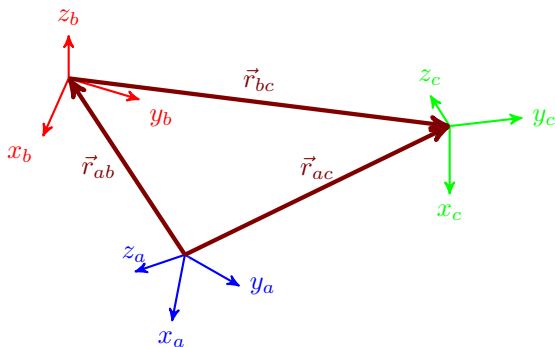

- translation between frames $\{a\}$ and $\{c\}$:

$$\vec{r}_{ac} = \vec{r}_{ab} + \vec{r}_{bc}$$

- written wrt/frame $\{a\}$

$$\begin{aligned}\vec{r}_{ac}^a &= \vec{r}_{ab}^a + \vec{r}_{bc}^a \\ &= \vec{r}_{ab}^a + C_b^a \vec{r}_{bc}^b\end{aligned}$$

_____ .3

2 Introduction to Velocity

Introduction to Velocity

- Given relationship for translation between moving (rotating and translating) frames

$$\vec{r}_{ac}^a = \vec{r}_{ab}^a + C_b^a \vec{r}_{bc}^b$$

what is linear velocity between frames?

$$\begin{aligned} \dot{\vec{r}}_{ac}^a &\equiv \frac{d}{dt} \vec{r}_{ac}^a \\ &= \frac{d}{dt} (\vec{r}_{ab}^a + C_b^a \vec{r}_{bc}^b) \\ &= \dot{\vec{r}}_{ab}^a + \dot{C}_b^a \vec{r}_{bc}^b + C_b^a \dot{\vec{r}}_{bc}^b \end{aligned}$$

- Why is $\dot{C}_b^a \neq 0$ in general? Re-coordinatization of \vec{r}_{bc}^b is time-dependent.
- \dot{C}_b^a is directly related to angular velocity between frames $\{a\}$ and $\{b\}$.

.4

3 Derivative of Rotation Matrix and Angular Velocity - Approach I

First approach to $\frac{d}{dt}C$ and angular velocity

Given a rotation matrix C , one of its properties is

$$[C_b^a]^T C_b^a = C_b^a [C_b^a]^T = \mathcal{I}$$

Taking the time-derivative of the "right-inverse" property

$$\begin{aligned} \frac{d}{dt} (C_b^a [C_b^a]^T) &= \frac{d}{dt} \mathcal{I} \\ \Rightarrow \underbrace{\dot{C}_b^a [C_b^a]^T}_{\Omega_{ab}^a} + \underbrace{C_b^a [\dot{C}_b^a]^T}_{(\dot{C}_b^a [C_b^a]^T)^T} &= 0 \\ \Rightarrow \Omega_{ab}^a + [\Omega_{ab}^a]^T &= 0 \\ \Rightarrow \Omega_{ab}^a &\text{ is skew-symmetric!} \end{aligned}$$

.5

First approach to $\frac{d}{dt}C$ and angular velocity

Define this skew-symmetric matrix Ω_{ab}^a

$$\Omega_{ab}^a = [\vec{\omega}_{ab}^a \times] = \begin{bmatrix} 0 & -\omega_z & \omega_y \\ \omega_z & 0 & -\omega_x \\ -\omega_y & \omega_x & 0 \end{bmatrix}$$

Note $\Omega_{ab}^a = \dot{C}_b^a [C_b^a]^T$

$$\Rightarrow \dot{C}_b^a = \Omega_{ab}^a C_b^a$$


is a means of finding derivative of rotation matrix provided we can further understand Ω_{ab}^a .

.6

First approach to $\frac{d}{dt}C$ and angular velocity


Now for some insight into physical meaning of Ω_{ab}^a .

- Consider a point p on a rigid body rotating with angular velocity $\vec{\omega} = [\omega_x, \omega_y, \omega_z]^T = \dot{\theta} \vec{k} = \dot{\theta} [k_x, k_y, k_z]^T$ with \vec{k} a unit vector.

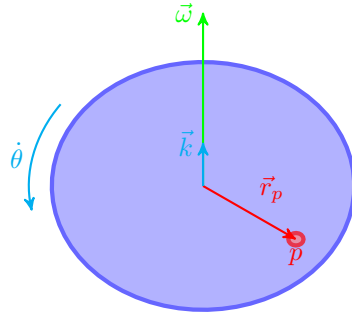

_____ .7

First approach to $\frac{d}{dt}C$ and angular velocity




From mechanics, linear velocity \vec{v}_p of point is

$$\vec{v}_p = \vec{\omega} \times \vec{r}_p = \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix} \times \begin{bmatrix} r_x \\ r_y \\ r_z \end{bmatrix} = \begin{bmatrix} \omega_y r_z - \omega_z r_y \\ \omega_z r_x - \omega_x r_z \\ \omega_x r_y - \omega_y r_x \end{bmatrix} = \underbrace{\begin{bmatrix} 0 & -\omega_z & \omega_y \\ \omega_z & 0 & -\omega_x \\ -\omega_y & \omega_x & 0 \end{bmatrix}}_{?} \begin{bmatrix} r_x \\ r_y \\ r_z \end{bmatrix}$$

_____ .8

First approach to $\frac{d}{dt}C$ and angular velocity



From mechanics, linear velocity \vec{v}_p of point is


$$\vec{v}_p = \vec{\omega} \times \vec{r}_p = \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix} \times \begin{bmatrix} r_x \\ r_y \\ r_z \end{bmatrix} = \begin{bmatrix} \omega_y r_z - \omega_z r_y \\ \omega_z r_x - \omega_x r_z \\ \omega_x r_y - \omega_y r_x \end{bmatrix} = \underbrace{\begin{bmatrix} 0 & -\omega_z & \omega_y \\ \omega_z & 0 & -\omega_x \\ -\omega_y & \omega_x & 0 \end{bmatrix}}_{\Omega = [\vec{\omega} \times]} \begin{bmatrix} r_x \\ r_y \\ r_z \end{bmatrix}$$

$\Rightarrow \Omega$ represents angular velocity and performs cross product

_____ .9

First approach to $\frac{d}{dt}C$ and angular velocity

Now let's add fixed frame $\{a\}$ and rotating frame $\{b\}$ attached to moving body such that there is angular velocity $\vec{\omega}_{ab}$ between them.



and take derivative wrt time

$$\begin{aligned} \dot{r}_{ap}^a &= \underbrace{\dot{C}_b^a}_{\Omega_{ab}^a C_b^a} r_{bp}^b + \underbrace{C_b^a \dot{r}_{bp}^b}_0 \\ &= \Omega_{ab}^a C_b^a r_{bp}^b \\ &= \Omega_{ab}^a r_{bp}^a = [\vec{\omega}_{ab}^a \times] r_{bp}^a \end{aligned}$$

.10

Start with position

$$\vec{r}_{ap}^a = \underbrace{\vec{r}_{ab}^a}_0 + C_b^a \vec{r}_{bp}^b$$

from which it is observed (compare to $\vec{v}_p = \vec{\omega} \times \vec{r}_p$) that Ω_{ab}^a represents cross product with angular velocity $\vec{\omega}_{ab}^a$.

4 Derivative of Rotation Matrix and Angular Velocity - Approach II

Second approach to $\frac{d}{dt}C$ and angular velocity

- Another approach to developing derivative of rotation matrix and angular velocity is based upon angle-axis representation of orientation and rotation matrix as exponential.
- This approach is included in notes.

.11

Second approach to $\frac{d}{dt}C$ and angular velocity

- Since the relative and fixed axis rotations must be performed in a particular order, their derivatives are somewhat challenging
- The angle-axis format, however, is readily differentiable as we can encode the 3 parameters by

$$\vec{K} \equiv \vec{k}(t)\theta(t) = \begin{bmatrix} K_1(t) \\ K_2(t) \\ K_3(t) \end{bmatrix}$$

where $\theta = \|\vec{K}\|$

- Hence,

$$\frac{d}{dt}\vec{K}(t) = \begin{bmatrix} \dot{K}_1(t) \\ \dot{K}_2(t) \\ \dot{K}_3(t) \end{bmatrix}$$

.12

Second approach to $\frac{d}{dt}C$ and angular velocity

- For a sufficiently "small" time interval we can often consider the axis of rotation to be \approx constant (i.e., $\vec{k}(t) = \vec{k}$)

$$\begin{aligned} \frac{d}{dt}\vec{K}(t) &\approx \frac{d}{dt}(\vec{k}\theta(t)) \\ &= \vec{k}\dot{\theta}(t) \end{aligned}$$

- This is referred to as the angular velocity ($\vec{\omega}(t)$) or the so called "body reference" angular velocity

Angular Velocity

$$\vec{\omega}(t) \equiv \vec{k}\dot{\theta}(t)$$

.13

Second approach to $\frac{d}{dt}C$ and angular velocity

- This definition of the angular velocity can also be related back to the rotation matrix.
Recalling that

$$C_b^a(t) = R_{\vec{k}_{ab}, \theta(t)} = e^{\kappa_{ab}^a \theta(t)}$$

- Hence,

$$\begin{aligned} \frac{d}{dt}C_b^a(t) &= \frac{d}{dt}e^{\kappa_{ab}^a \theta(t)} \\ &= \frac{\partial e^{\kappa_{ab}^a \theta(t)}}{\partial \theta} \frac{d\theta}{dt} \\ &= \kappa_{ab}^a e^{\kappa_{ab}^a \theta(t)} \dot{\theta}(t) \\ &= \left(\kappa_{ab}^a \dot{\theta}(t) \right) C_b^a(t) \\ \Rightarrow \dot{C}_b^a(t) [C_b^a(t)]^T &= \kappa_{ab}^a \dot{\theta}(t) \end{aligned}$$

.14

Second approach to $\frac{d}{dt}C$ and angular velocity

Notice that

$$\begin{aligned} \kappa_{ab}^a \dot{\theta}(t) &= \text{Skew} [k_{ab}^a] \dot{\theta}(t) \\ &= \text{Skew} [k_{ab}^a \dot{\theta}(t)] \\ &= \text{Skew} [\vec{\omega}_{ab}^a] = \Omega_{ab}^a \end{aligned}$$

Therefore,

$$\dot{C}_b^a(t) [C_b^a(t)]^T = \Omega_{ab}^a$$

or

$$\dot{C}_b^a = \Omega_{ab}^a C_b^a$$

.15

Second approach to $\frac{d}{dt}C$ and angular velocity

Note

$$\kappa \vec{a} = \begin{bmatrix} 0 & -k_3 & k_2 \\ k_3 & 0 & -k_1 \\ -k_2 & k_1 & 0 \end{bmatrix} \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} k_2 a_3 - k_3 a_2 \\ k_3 a_1 - k_1 a_3 \\ k_1 a_2 - k_2 a_1 \end{bmatrix} = \vec{k} \times \vec{a}$$

Hence, we can think of the skew-symmetric matrix as

$$\kappa = [\vec{k} \times]$$

or, in the case of angular velocity

$$\Omega = [\vec{\omega} \times]$$

.16

5 Properties of Skew-symmetric Matrices

Properties of Skew-symmetric Matrices

$$\begin{aligned}
 C\Omega C^T \vec{b} &= C [\vec{\omega} \times (C^T \vec{b})] \\
 &= C \vec{\omega} \times (C^T \vec{b}) \\
 &= C \vec{\omega} \times \vec{b} \\
 &= [C \vec{\omega} \times] \vec{b}
 \end{aligned}$$

Therefore (from above),

$$C\Omega C^T = C[\vec{\omega} \times]C^T = [C\vec{\omega} \times]$$

and (via distributive property)

$$C[\vec{\omega} \times] = [C\vec{\omega} \times]C$$

noting both $\vec{\omega}$ and vector with which cross-product will be taken are assumed to be in the same coordinate frame and thus both need to be re-coordinated.

.17

Properties of Skew-symmetric Matrices

$$\begin{aligned}
 \dot{C}_b^a &= \Omega_{ab}^a C_b^a \\
 &= [\vec{\omega}_{ab}^a \times] C_b^a \\
 &= [C_b^a \vec{\omega}_{ab}^b \times] C_b^a \\
 &= C_b^a [\vec{\omega}_{ab}^b \times] \\
 &= C_b^a \Omega_{ab}^b
 \end{aligned}$$

$$\Rightarrow \dot{C}_b^a = \Omega_{ab}^a C_b^a = C_b^a \Omega_{ab}^b$$

.18

Summary of Angular Velocity and Notation

Angular velocity can be

- described as a vector
 - the angular velocity of the b -frame wrt the a -frame resolved in the c -frame, $\vec{\omega}_{ab}^c$
 - $\vec{\omega}_{ab} = -\vec{\omega}_{ba}$
- described as a skew-symmetric matrix $\Omega_{ab}^c = [\vec{\omega}_{ab}^c \times]$
 - the skew-symmetric matrix is equivalent to the vector cross product when pre-multiplying another vector
- related to the derivative of the rotation matrix

$$\begin{aligned}
 \dot{C}_b^a &= \Omega_{ab}^a C_b^a = C_b^a \Omega_{ab}^b \\
 \dot{C}_b^a &= -\Omega_{ba}^a C_b^a = -C_b^a \Omega_{ba}^b
 \end{aligned}$$

.19

6 Propagation/Addition of Angular Velocity

Propagation/Addition of Angular Velocity

Consider the derivative of the composition of rotations $C_2^0 = C_1^0 C_2^1$.

$$\begin{aligned}
 \frac{d}{dt} C_2^0 &= \frac{d}{dt} C_1^0 C_2^1 \\
 \Rightarrow \dot{C}_2^0 &= \dot{C}_1^0 C_2^1 + C_1^0 \dot{C}_2^1 \\
 \Rightarrow \Omega_{02}^0 C_2^0 &= \Omega_{01}^0 C_1^0 C_2^1 + C_1^0 C_2^1 \Omega_{12}^2 \\
 \Rightarrow \Omega_{02}^0 &= \Omega_{01}^0 C_2^0 [C_2^0]^T + C_2^0 \Omega_{12}^2 [C_2^0]^T \\
 \Rightarrow [\vec{\omega}_{02}^0 \times] &= [\vec{\omega}_{01}^0 \times] + [C_2^0 \vec{\omega}_{12}^2 \times] \\
 \Rightarrow \vec{\omega}_{02}^0 &= \vec{\omega}_{01}^0 + \vec{\omega}_{12}^0
 \end{aligned}$$

⇒ angular velocities (as vectors) add so long as resolved common coordinate system

.20

7 Linear Position, Velocity and Acceleration

Linear Position

Consider the motion of a fixed point (origin of frame {2}) in a rotating frame (frame {1}) as seen from an inertial (frame {0})

- frames {0} and {1} have the same origin
- frame {1} rotates (about a unit vector \vec{k}) wrt frame {0}
- origin of frame {2} is fixed wrt frame {1}

Position:

$$\begin{aligned}
 \vec{r}_{02}^0(t) &= \vec{r}_{01}^0(t) + \vec{r}_{12}^0(t) \\
 &= C_1^0(t) \vec{r}_{12}^1
 \end{aligned}$$

.21

Linear Velocity

Linear velocity:

$$\begin{aligned}
 \dot{\vec{r}}_{02}^0(t) &= \frac{d}{dt} C_1^0(t) \vec{r}_{12}^1 \\
 &= \dot{C}_1^0(t) \vec{r}_{12}^1 \\
 &= [\vec{\omega}_{01}^0 \times] C_1^0(t) \vec{r}_{12}^1 \\
 &= \vec{\omega}_{01}^0 \times \vec{r}_{12}^0(t)
 \end{aligned}$$

.22

Linear Acceleration

Linear acceleration:

$$\begin{aligned}
 \ddot{\vec{r}}_{02}^0 &= \frac{d}{dt} (\vec{\omega}_{01}^0 \times (C_1^0(t) \vec{r}_{12}^1)) \\
 &= \dot{\vec{\omega}}_{01}^0 \times (C_1^0(t) \vec{r}_{12}^1) + \vec{\omega}_{01}^0 \times (\dot{C}_1^0(t) \vec{r}_{12}^1) \\
 &= \dot{\vec{\omega}}_{01}^0 \times \vec{r}_{12}^0(t) + \vec{\omega}_{01}^0 \times (\vec{\omega}_{01}^0 \times \vec{r}_{12}^0(t))
 \end{aligned}$$


Transverse accel

Centripetal accel ($\omega^2 r$)

.23

Linear Position

We can get back to where we started ... motion (translation and rotation) between frames and their derivatives.

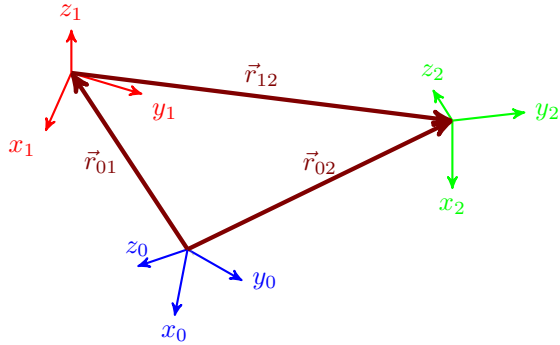

Translation (position) between frames {0} and {1}:

$$\begin{aligned} \vec{r}_{02}^0 &= \vec{r}_{01}^0 + \vec{r}_{12}^0 \\ &= \vec{r}_{01}^0 + C_1^0 \vec{r}_{12}^1 \end{aligned}$$

.24

Linear Velocity

Linear velocity:

$$\begin{aligned} \dot{\vec{r}}_{02}^0(t) &= \frac{d}{dt} (\vec{r}_{01}^0 + C_1^0 \vec{r}_{12}^1) \\ &= \dot{\vec{r}}_{01}^0 + \dot{C}_1^0 \vec{r}_{12}^1 + C_1^0 \dot{\vec{r}}_{12}^1 \\ &= \dot{\vec{r}}_{01}^0 + \Omega_{01}^0 C_1^0 \vec{r}_{12}^1 + C_1^0 \dot{\vec{r}}_{12}^1 \\ &= \dot{\vec{r}}_{01}^0 + [\vec{\omega}_{01}^0 \times] C_1^0 \vec{r}_{12}^1 + C_1^0 \dot{\vec{r}}_{12}^1 \\ &= \dot{\vec{r}}_{01}^0 + \vec{\omega}_{01}^0 \times (C_1^0 \vec{r}_{12}^1) + C_1^0 \dot{\vec{r}}_{12}^1 \end{aligned}$$

.25

Linear Acceleration

Linear acceleration:

$$\begin{aligned} \ddot{\vec{r}}_{02}^0 &= \frac{d}{dt} (\dot{\vec{r}}_{01}^0 + \vec{\omega}_{01}^0 \times (C_1^0 \vec{r}_{12}^1) + C_1^0 \dot{\vec{r}}_{12}^1) \\ &= \ddot{\vec{r}}_{01}^0 + \dot{\vec{\omega}}_{01}^0 \times (C_1^0 \vec{r}_{12}^1) + \vec{\omega}_{01}^0 \times (\dot{C}_1^0 \vec{r}_{12}^1) + \vec{\omega}_{01}^0 \times (C_1^0 \dot{\vec{r}}_{12}^1) + \dot{C}_1^0 \dot{\vec{r}}_{12}^1 + C_1^0 \ddot{\vec{r}}_{12}^1 \end{aligned}$$

$$= \ddot{\vec{r}}_{01}^0 + \dot{\vec{\omega}}_{01}^0 \times \vec{r}_{12}^0(t) + \vec{\omega}_{01}^0 \times (\vec{\omega}_{01}^0 \times \vec{r}_{12}^0(t)) + 2\vec{\omega}_{01}^0 \times (C_1^0 \dot{\vec{r}}_{12}^1) + C_1^0 \ddot{\vec{r}}_{12}^1$$

accel of {1}'s origin from {0} in {0} → $\ddot{\vec{r}}_{01}^0$
Transverse accel → $\dot{\vec{\omega}}_{01}^0 \times \vec{r}_{12}^0(t)$
Centripetal accel ($\omega^2 r$) → $\vec{\omega}_{01}^0 \times (\vec{\omega}_{01}^0 \times \vec{r}_{12}^0(t))$
Coriolis accel ($2\omega \times v$) → $2\vec{\omega}_{01}^0 \times (C_1^0 \dot{\vec{r}}_{12}^1)$
accel of {2}'s origin from {1} in {0} → $C_1^0 \ddot{\vec{r}}_{12}^1$

The End

.26

.27